Award Number: DAMD17-01-1-0750

Acquisition of a Magnetic Resonance Imaging System for TITLE:

Research on the Neural Basis of Human Cognition

PRINCIPAL INVESTIGATOR: Helen J. Neville, Ph.D.

Paul Dassonville, Ph.D. Margaret Sereno, Ph.D. Ulrich Mayr, Ph.D.

Ed Awh, Ph.D.

Don Tucker, Ph.D.

Mark Dow

Michael Anderson, Ph.D. Michael Posner, Ph.D.

Mary Rothbart, Ph.D.

Marjorie Woollacott, Ph.D.

Paul van Donkelaar, Ph.D.

Terry Takahashi, Ph.D. Richard Marrocco, Ph.D.

Ray Nunnally, Ph.D.

Jolinda Smith, Ph.D.

Ed Vogel, Ph.D.

CONTRACTING ORGANIZATION: University of Oregon

Eugene, Oregon 97403-5219

REPORT DATE: September 2002

TYPE OF REPORT: Annual

PREPARED FOR: U.S. Army Medical Research and Materiel Command

Fort Detrick, Maryland 21702-5012

DISTRIBUTION STATEMENT: Approved for Public Release;

Distribution Unlimited

The views, opinions and/or findings contained in this report are those of the author(s) and should not be construed as an official Department of the Army position, policy or decision unless so designated by other documentation.

20021024 044

REPORT DOCUMENTATION PAGE

Form Approved

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing this collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503

1. AGENCY USE ONLY (Leave blank) 2 REPORT DATE

1. AGENCY USE ONLY (Leave blank) 2. REPORT DATE 3. REPORT TYPE AND DATES COVERED				
	September 2002	Annual (15 Aug		
4. TITLE AND SUBTITLE			5. FUNDING N	
Acquisition of a Ma	DAMD17-01	-1-0750		
System for Research	on the Neural Bas:	is of Human		
Cognition				
6. AUTHOR(S): Helen J. Neville, Ph	D. Poul Doggonville Ph.D. Margar	ot Corono Dh D. Illrigh		
Mayr, Ph.D., Marjorie Woollacott, P.				
Takahashi, Ph.D., Richard Marrocco,				
Dow, Jolinda Smith, Ph.D., Michael				
Ph.D., Ed Vogel, Ph.D.		,_ ,,,,		
7. PERFORMING ORGANIZATION N	AME(S) AND ADDRESS(ES)		8. PERFORMIN	G ORGANIZATION
			REPORT NU	MBER
University of Orego	n			
Eugene, Oregon 974	03-5219			
F Mail: navilla@aragan uaragan a	4			
E-Mail: neville@oregon.uoregon.e	· · · · · · · · · · · · · · · · · · ·	,,,,		
9. SPONSORING / MONITORING A	GENCY NAME(S) AND ADDRESS(ES	i)		NG / MONITORING
II C A Madical December of	Matarial Comment		AGENCY R	EPORT NUMBER
U.S. Army Medical Research and				
Fort Detrick, Maryland 21702-50	12	1		
11. SUPPLEMENTARY NOTES	CHECK PROPERTY AND ADDRESS OF THE PARTY OF T			
report contains color				
100010 001101111111111111111111111111				
12a. DISTRIBUTION / AVAILABILITY STATEMENT 12b. DISTRIBUTION CODE				
Approved for Public Release; Distribution Unlimited				
13. Abstract (Maximum 200 Words)	(abstract should contain no proprietar	y or confidential informatio	<u>nn)</u>	
•				
From August, 15, 2001 through A	august 14, 2002 a facility for hous	ing the 3T fMRI unit w	as constructed	
From August, 15, 2001 through A the essential accessory items (stir	august 14, 2002 a facility for hous nulus/response computers, digital	ing the 3T fMRI unit w projection system, eye	vas constructed, tracking syster	n, auditory system) integrated
From August, 15, 2001 through A the essential accessory items (stir into the MRI system and made or	august 14, 2002 a facility for hous nulus/response computers, digital perational and initial, high quality	ing the 3T fMRI unit w projection system, eye human and non-human	vas constructed, tracking syster subject data ha	n, auditory system) integrated ave been obtained. An image
From August, 15, 2001 through A the essential accessory items (stir	august 14, 2002 a facility for hous nulus/response computers, digital perational and initial, high quality	ing the 3T fMRI unit w projection system, eye human and non-human	vas constructed, tracking syster subject data ha	n, auditory system) integrated ave been obtained. An image
From August, 15, 2001 through A the essential accessory items (stir into the MRI system and made or analysis laboratory was equipped A large scale server (with 4 TB o	august 14, 2002 a facility for hous nulus/response computers, digital perational and initial, high quality and made operational; this lab ha f tape storage) and local area netw	ing the 3T fMRI unit we projection system, eye human and non-human s six workstation-level work were installed to so	vas constructed, tracking system subject data has computers for apport the imag	n, auditory system) integrated ave been obtained. An image data processing and analysis. he analysis and data processing
From August, 15, 2001 through A the essential accessory items (stir into the MRI system and made or analysis laboratory was equipped A large scale server (with 4 TB of functions. A radio frequency (RF	august 14, 2002 a facility for hous nulus/response computers, digital perational and initial, high quality and made operational; this lab ha f tape storage) and local area netwonth	ing the 3T fMRI unit we projection system, eye human and non-human as six workstation-level work were installed to superation for designing	vas constructed, -tracking syster is subject data has computers for support the image and building cu	n, auditory system) integrated ave been obtained. An image data processing and analysis. The analysis and data processing astom MRI coils. A MRI
From August, 15, 2001 through A the essential accessory items (stir into the MRI system and made or analysis laboratory was equipped A large scale server (with 4 TB of functions. A radio frequency (RF system simulator was installed an	august 14, 2002 a facility for hous nulus/response computers, digital perational and initial, high quality and made operational; this lab ha f tape storage) and local area netwon coil lab was equipped and is in cold d modified to give full functional	ing the 3T fMRI unit we projection system, eye human and non-human as six workstation-level work were installed to superation for designing ity for acclimating subj	vas constructed, tracking system subject data has computers for apport the image and building cuects and testing	n, auditory system) integrated ave been obtained. An image data processing and analysis. The analysis and data processing astom MRI coils. A MRI protocols prior to actual
From August, 15, 2001 through A the essential accessory items (stir into the MRI system and made or analysis laboratory was equipped A large scale server (with 4 TB of functions. A radio frequency (RF system simulator was installed ar fMRI use. The primary support states.)	august 14, 2002 a facility for hous nulus/response computers, digital perational and initial, high quality and made operational; this lab ha f tape storage) and local area netw coil lab was equipped and is in cold d modified to give full functional aff for the fMRI facility has been	ing the 3T fMRI unit we projection system, eye human and non-human as six workstation-level work were installed to superation for designing ity for acclimating subjhired. Three workshop	vas constructed, tracking system subject data has computers for apport the image and building cuects and testings on fMRI, RF	n, auditory system) integrated ave been obtained. An image data processing and analysis. The analysis and data processing astom MRI coils. A MRI protocols prior to actual coil construction and fMRI
From August, 15, 2001 through A the essential accessory items (stir into the MRI system and made or analysis laboratory was equipped A large scale server (with 4 TB of functions. A radio frequency (RF system simulator was installed ar fMRI use. The primary support state of the system had been held for the system simulator was installed ar fMRI use. The primary support state of the system simulator was installed for the system system system support state of the system	august 14, 2002 a facility for hous nulus/response computers, digital perational and initial, high quality and made operational; this lab ha f tape storage) and local area netw coil lab was equipped and is in cold d modified to give full functional aff for the fMRI facility has been or training the research staff at the	ing the 3T fMRI unit we projection system, eye human and non-human se six workstation-level work were installed to superation for designing ity for acclimating subjicted. Three workshop UO in the technology	vas constructed, tracking system subject data has computers for apport the image and building cuects and testings on fMRI, RF	n, auditory system) integrated ave been obtained. An image data processing and analysis. The analysis and data processing astom MRI coils. A MRI protocols prior to actual coil construction and fMRI
From August, 15, 2001 through A the essential accessory items (stir into the MRI system and made or analysis laboratory was equipped A large scale server (with 4 TB of functions. A radio frequency (RF system simulator was installed ar fMRI use. The primary support states.)	august 14, 2002 a facility for hous nulus/response computers, digital perational and initial, high quality and made operational; this lab ha f tape storage) and local area netw coil lab was equipped and is in cold d modified to give full functional aff for the fMRI facility has been or training the research staff at the	ing the 3T fMRI unit we projection system, eye human and non-human se six workstation-level work were installed to superation for designing ity for acclimating subjicted. Three workshop UO in the technology	vas constructed, tracking system subject data has computers for apport the image and building cuects and testings on fMRI, RF	n, auditory system) integrated ave been obtained. An image data processing and analysis. The analysis and data processing astom MRI coils. A MRI protocols prior to actual coil construction and fMRI
From August, 15, 2001 through A the essential accessory items (stir into the MRI system and made or analysis laboratory was equipped A large scale server (with 4 TB of functions. A radio frequency (RF system simulator was installed ar fMRI use. The primary support state of the system had been held for the system simulator was installed ar fMRI use. The primary support state of the system simulator was installed for the system system system support state of the system	august 14, 2002 a facility for hous nulus/response computers, digital perational and initial, high quality and made operational; this lab ha f tape storage) and local area netw coil lab was equipped and is in cold d modified to give full functional aff for the fMRI facility has been or training the research staff at the	ing the 3T fMRI unit we projection system, eye human and non-human se six workstation-level work were installed to superation for designing ity for acclimating subjicted. Three workshop UO in the technology	vas constructed, tracking system subject data has computers for apport the image and building cuects and testings on fMRI, RF	n, auditory system) integrated ave been obtained. An image data processing and analysis. The analysis and data processing astom MRI coils. A MRI protocols prior to actual coil construction and fMRI
From August, 15, 2001 through A the essential accessory items (stir into the MRI system and made or analysis laboratory was equipped A large scale server (with 4 TB of functions. A radio frequency (RF system simulator was installed ar fMRI use. The primary support state of the system had been held for the system simulator was installed ar fMRI use. The primary support state of the system simulator was installed for the system system system support state of the system	august 14, 2002 a facility for hous nulus/response computers, digital perational and initial, high quality and made operational; this lab ha f tape storage) and local area netw coil lab was equipped and is in cold d modified to give full functional aff for the fMRI facility has been or training the research staff at the	ing the 3T fMRI unit we projection system, eye human and non-human se six workstation-level work were installed to superation for designing ity for acclimating subjicted. Three workshop UO in the technology	vas constructed, tracking system subject data has computers for apport the image and building cuects and testings on fMRI, RF	n, auditory system) integrated ave been obtained. An image data processing and analysis. The analysis and data processing astom MRI coils. A MRI protocols prior to actual coil construction and fMRI
From August, 15, 2001 through A the essential accessory items (stir into the MRI system and made or analysis laboratory was equipped A large scale server (with 4 TB of functions. A radio frequency (RF system simulator was installed ar fMRI use. The primary support state of the system had been held for the system simulator was installed ar fMRI use. The primary support state of the system simulator was installed for the system system system support state of the system	august 14, 2002 a facility for hous nulus/response computers, digital perational and initial, high quality and made operational; this lab ha f tape storage) and local area netw coil lab was equipped and is in cold d modified to give full functional aff for the fMRI facility has been or training the research staff at the	ing the 3T fMRI unit we projection system, eye human and non-human se six workstation-level work were installed to superation for designing ity for acclimating subjicted. Three workshop UO in the technology	vas constructed, tracking system subject data has computers for apport the image and building cuects and testings on fMRI, RF	n, auditory system) integrated ave been obtained. An image data processing and analysis. The analysis and data processing astom MRI coils. A MRI protocols prior to actual coil construction and fMRI
From August, 15, 2001 through A the essential accessory items (stir into the MRI system and made or analysis laboratory was equipped A large scale server (with 4 TB of functions. A radio frequency (RF system simulator was installed ar fMRI use. The primary support state of the system had been held for the system simulator was installed ar fMRI use. The primary support state of the system simulator was installed for the system system system support state of the system	august 14, 2002 a facility for hous nulus/response computers, digital perational and initial, high quality and made operational; this lab ha f tape storage) and local area netw coil lab was equipped and is in cold d modified to give full functional aff for the fMRI facility has been or training the research staff at the	ing the 3T fMRI unit we projection system, eye human and non-human se six workstation-level work were installed to superation for designing ity for acclimating subjicted. Three workshop UO in the technology	vas constructed, tracking system subject data has computers for apport the image and building cuects and testings on fMRI, RF	n, auditory system) integrated ave been obtained. An image data processing and analysis. The analysis and data processing astom MRI coils. A MRI protocols prior to actual coil construction and fMRI
From August, 15, 2001 through A the essential accessory items (stir into the MRI system and made or analysis laboratory was equipped A large scale server (with 4 TB of functions. A radio frequency (RF system simulator was installed ar fMRI use. The primary support stata processing have been held for fMRI have been approved and in	august 14, 2002 a facility for hous nulus/response computers, digital perational and initial, high quality and made operational; this lab ha f tape storage) and local area netw coil lab was equipped and is in cold d modified to give full functional aff for the fMRI facility has been or training the research staff at the	ing the 3T fMRI unit we projection system, eye human and non-human se six workstation-level work were installed to superation for designing ity for acclimating subjicted. Three workshop UO in the technology	vas constructed, tracking system subject data has computers for apport the image and building cuects and testings on fMRI, RF	n, auditory system) integrated ave been obtained. An image data processing and analysis. The analysis and data processing astom MRI coils. A MRI protocols prior to actual coil construction and fMRI
From August, 15, 2001 through A the essential accessory items (stir into the MRI system and made or analysis laboratory was equipped A large scale server (with 4 TB of functions. A radio frequency (RF system simulator was installed arf fMRI use. The primary support state processing have been held for fMRI have been approved and in	august 14, 2002 a facility for hous nulus/response computers, digital perational and initial, high quality and made operational; this lab ha f tape storage) and local area netw coil lab was equipped and is in cold d modified to give full functional aff for the fMRI facility has been or training the research staff at the stial human subject studies are now	ing the 3T fMRI unit we projection system, eye human and non-human se six workstation-level work were installed to superation for designing ity for acclimating subjicted. Three workshop UO in the technology	vas constructed, tracking system subject data has computers for upport the imag and building cu ects and testing s on fMRI, RF of fMRI. Protoc	n, auditory system) integrated ave been obtained. An image data processing and analysis. The analysis and data processing astom MRI coils. A MRI protocols prior to actual coil construction and fMRI
From August, 15, 2001 through A the essential accessory items (stir into the MRI system and made or analysis laboratory was equipped A large scale server (with 4 TB of functions. A radio frequency (RF system simulator was installed ar fMRI use. The primary support stata processing have been held for fMRI have been approved and in	august 14, 2002 a facility for hous nulus/response computers, digital perational and initial, high quality and made operational; this lab ha f tape storage) and local area netw coil lab was equipped and is in cold d modified to give full functional aff for the fMRI facility has been or training the research staff at the stial human subject studies are now	ing the 3T fMRI unit we projection system, eye human and non-human se six workstation-level work were installed to superation for designing ity for acclimating subjicted. Three workshop UO in the technology	vas constructed, tracking system subject data has computers for upport the imag and building cu ects and testing s on fMRI, RF of fMRI. Protoc	n, auditory system) integrated ave been obtained. An image data processing and analysis, we analysis and data processing astom MRI coils. A MRI grotocols prior to actual coil construction and fMRI cols for cognitive studies with
From August, 15, 2001 through A the essential accessory items (stir into the MRI system and made or analysis laboratory was equipped A large scale server (with 4 TB of functions. A radio frequency (RF system simulator was installed arf fMRI use. The primary support state processing have been held for fMRI have been approved and in	august 14, 2002 a facility for hous nulus/response computers, digital perational and initial, high quality and made operational; this lab ha f tape storage) and local area netw coil lab was equipped and is in cold d modified to give full functional aff for the fMRI facility has been or training the research staff at the stial human subject studies are now	ing the 3T fMRI unit we projection system, eye human and non-human se six workstation-level work were installed to superation for designing ity for acclimating subjicted. Three workshop UO in the technology	vas constructed, tracking system subject data has computers for upport the imag and building cu ects and testing s on fMRI, RF of fMRI. Protoc	n, auditory system) integrated ave been obtained. An image data processing and analysis, we analysis and data processing astom MRI coils. A MRI aprotocols prior to actual coil construction and fMRI cols for cognitive studies with
From August, 15, 2001 through A the essential accessory items (stir into the MRI system and made or analysis laboratory was equipped A large scale server (with 4 TB of functions. A radio frequency (RF system simulator was installed arf fMRI use. The primary support state processing have been held for fMRI have been approved and in	august 14, 2002 a facility for hous nulus/response computers, digital perational and initial, high quality and made operational; this lab ha f tape storage) and local area netw coil lab was equipped and is in cold d modified to give full functional aff for the fMRI facility has been or training the research staff at the stial human subject studies are now	ing the 3T fMRI unit we projection system, eye human and non-human se six workstation-level work were installed to superation for designing ity for acclimating subjicted. Three workshop UO in the technology	vas constructed, tracking system subject data has computers for upport the imag and building cu ects and testing s on fMRI, RF of fMRI. Protoc	n, auditory system) integrated ave been obtained. An image data processing and analysis, as analysis and data processing astom MRI coils. A MRI protocols prior to actual coil construction and fMRI cols for cognitive studies with
From August, 15, 2001 through A the essential accessory items (stir into the MRI system and made or analysis laboratory was equipped A large scale server (with 4 TB of functions. A radio frequency (RF system simulator was installed ar fMRI use. The primary supports data processing have been held for fMRI have been approved and in	august 14, 2002 a facility for househulus/response computers, digital perational and initial, high quality and made operational; this lab has f tape storage) and local area network of coil lab was equipped and is in cold modified to give full functional aff for the fMRI facility has been or training the research staff at the tial human subject studies are now	ing the 3T fMRI unit we projection system, eye human and non-human is six workstation-level fork were installed to superation for designing ity for acclimating subjicted. Three workshop UO in the technology of worderway.	vas constructed, tracking system subject data had computers for upport the imag and building cu ects and testing s on fMRI, RF of fMRI. Protoc	n, auditory system) integrated ave been obtained. An image data processing and analysis, we analysis and data processing astom MRI coils. A MRI grotocols prior to actual coil construction and fMRI cols for cognitive studies with

Table of Contents

Cover	1
SF 298	2
Introduction	4
Body	4
Key Research Accomplishments	5
Reportable Outcomes	5
Conclusions	6
References	6
Appendices	7

Introduction:

The main objectives of the research are to apply fMRI to investigate (a) the fundamental mechanisms and systems essential to processing, localizing and attending to specific events and stimuli in complex environments, (b) the neural systems important for motor control, sensory-motor integration and learning, (c) the processes of spatial attention and spatial 'working memory' and (d) the integration of fMRI results (having high spatial resolution) with electrophysiological data (ERPs and single cell measurements) having high temporal resolution and the integration of fMRI data with white matter 'tractography' (diffusion tensor MRI).

Body:

In the twelve month period (August, 2001 to August, 2002) the primary accomplishments are the completed construction of the facility for housing the fMRI unit, the delivery and installation of the fMRI unit, the successful integration and implementation of the stimulus response systems, eye-tracking system, subject physiologic monitoring system, the set up of the image analysis laboratory and the RF coil laboratory and the acquisition of initial structural and functional MRI data from human and non-human subjects. All of these were fundamentally necessary steps to reach the level of performing the research studies outlined in the Statement of Work. The MRI unit has been operational since mid-March of 2002 and the other ancillary equipment integrated and operational since late June of 2002.

With respect to the human studies of brain systems and mechanisms, initial human subject images are provided in the appendix. High quality 3-D structural images with good gray-white matter differentiation are routinely obtainable with the 3T system (See Figure 1). These structural images typically have 1 millimeter isotropic resolution. Structural images (2-D) with a so-called 'T2' contrast are also routinely obtainable with an in-plane resolution of 500 microns (See Figure 2). High definition MR 'angiograms' are also feasible with the system and can be used to map larger blood vessel locations to remove potential contributions of such vessels to the fMRI results (See Figure 3). Functional MRI data from both somatosensory tasks (finger tapping for example) and purely cognitive tasks (solving arithmetic calculations versus recalling lyrics to songs) have been obtained on a regular basis (See Figure 4).

With regard to the animal studies for auditory and visual processing, three custom-designed RF coils have been built and tested. Images from the coil designed for studies in the owl are provided (See Figure 5) and initial images from primates using the 3T MRI unit are also include in the appendix (Figure 6).

An additional four pages of pictures are provided in the appendix showing the construction, system installation and set-up of the MRI system. Also a picture of a labbuilt MRI coil is provided in this portion of the appendix.

Interdisciplinary research training is also a primary component of the scope of work. The fMRI facility has already conducted three workshops for the faculty and research staff at the University. One was a workshop on the basics of fMRI, another on the design and construction of RF coils, and the third on the use of specific software tools for the analysis of fMRI data.

Ground work for the implementation of electrophysiological data acquisition simultaneously with fMRI has been done. Circuit designs for filtering the MRI-induced signals in the electrophysiology leads are to be provided by Professor Nikos Logothetis of the Max Planck Institute (Tubingen, Germany) and these will be constructed and tested for use in both human and primate studies.

To date, six human subject use protocols for fMRI studies have either been approved or are in the process of review for approval by the University's Human Subject Compliance Committee.

Finally, work on the development of automated and semi-automated edge-detection software has been done in the past year. The objective is to remove and/or reduce user bias and selection in the data analysis process and to provide quantitative and robust methods for image segmentation and parcellation. Also, a fully functional program for the conversion of the industry standard 'DICOM' image files (that most MRI devices generate) to other commonly used image files in data analysis programs has been accomplished.

Key Research Accomplishments:

- Demonstration of state-of-the-art human and non-human subject MRI results on a routine, day-to-day basis
- Establishment of the capability to design and fabricate purpose-built MRI (RF) coils on an 'everyday' basis
- Implementation of the MRI-controlled triggering of visual stimuli to subjects in the MRI magnet and acquisition of fMRI data from this; the acquisition of initial human subject protocol fMRI results

Reportable Outcomes:

Funding Applied for: NIH and NSF grant and grant renewal submissions from Drs. Neville, Dassonville, Tucker, Nunnally and Dow have been made and are in progress of submission for October 1, 2002 and February 1, 2003 dates.

Research Opportunites Supported: Collaborative research into blood-brain barrier properties (Dr. Ed Neuwelt, Oregon Health Science University) has been initiated with support from this award; research opportunities with Electrical Geodesics Inc (Dr. Jeff Eriksen) and InVivoMetrics, Inc (Gary Tye) have also resulted from this award.

Conclusions:

The facility has only just become fully functional within the past eight weeks. Initial results have been obtained, but no study has been completed at this time.

Edge detection/image segmentation software that is virtually automated and free from user bias has a number of potential scientific and medical uses as a product. Quantitative assessment of any form of image data (MRI, CT, ultrasound, x-ray, optical imaging – to name the most obvious) whether from research or medical applications has many potential uses. Rapid image segmentation and parcellation could aid in the more timely review of medical imaging data and reduce the number of errors in the 'reading' of diagnostic images. This same software can be used for better treatment planning and assessment of treatment outcomes.

References: none



Figure 1. Sagittal plane multiplanar reformat image from a 3-D MRI acquisition.

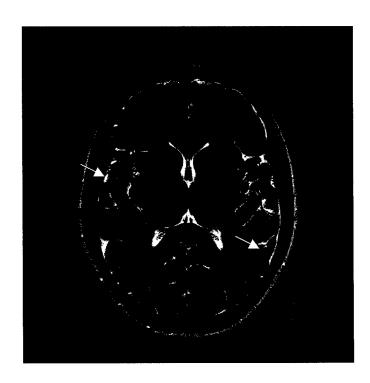


Figure 2. 'T2' copntrast image with 500 micron in-plane resolution. Note the small blood vessels seem as darker objects within the brain on both the right and left sides of the image. Also note the very crisp gray and white matter differentiation.



Figure 3. MR angiogram from the 3T Siemens Allegra at the U of O. Human subject - no contrast material used. Note the number of smaller vessels seen on the image.

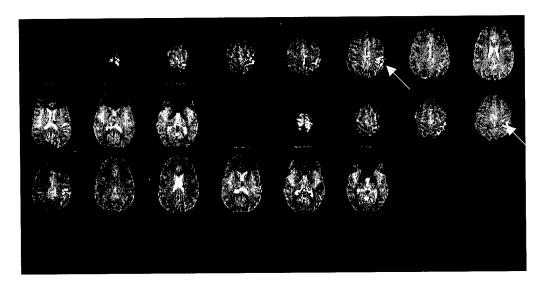


Figure 4. Processed fMRI data from finger tapping exercise. The total time to acquire the data was 6 min 44 sec. Images are acquired in an 'interleaved' manner. A total of 22 slices covering of most of the brain were acquired every 2 seconds. The image resolution is approximately 3 mm. Areas of activation appear as brighter (arrows).

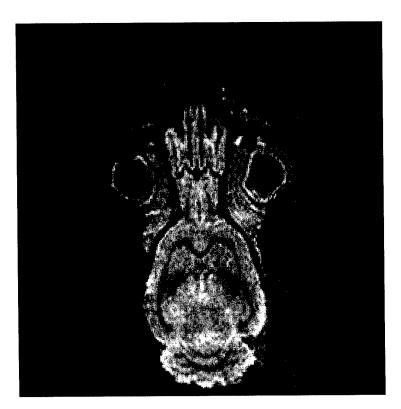


Figure 5. Test images of a rat head using the 'owl' coil. The inplane resolution of the image is approximately 200 microns. A full 3-D image set was acquired in 7 minutes at this resolution.

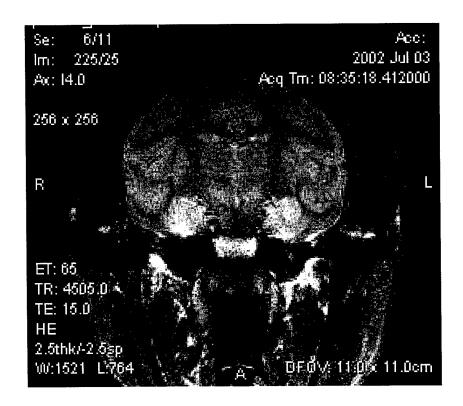


Figure 6. Image ('proton density' contrast) of a live primate brain with 400 micron in-plane resolution. Good gray-white matter contrast is obtained with high spatial resolution. The 2-D image data of the whole brain took less than ten minutes to obtain.

